



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

H03M 7/30

A1

(11) International Publication Number:

WO 92/09142

(43) International Publication Date:

29 May 1992 (29.05.92)

(21) International Application Number:

PCT/US90/06670 (81) Designated States: AT, AT (European patent), AU, BB, E


(22) International Filing Date: 14 November 1990 (14.11.90)

(71) Applicant: UTAH STATE UNIVERSITY FOUNDATION
[US/US]; U.M.C. 9300, Utah State University, Logan,
UT 84322 (US).(72) Inventors: HARRIS, Richard, W. ; 1402 East 800 North,
Logan, UT 84321 (US). ISRAELSEN, Paul, D. ; 2385
East 2100 North, North Logan, UT 84321 (US).(74) Agents: HASHIM, Paul, C. et al.; Venable, Baetjer, How-
ard & Civiletti, 1201 New York Avenue, N.W., Suite
1000, Washington, DC 20005 (US).BE (European patent), BF (OAPI patent), BG, BJI
(OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI
patent), CH, CH (European patent), CM (OAPI
patent), DE, DE (Utility model), DE (European
patent), DK, DK (European patent), ES, ES (European
patent), FI, FR (European patent), GA (OAPI patent),
GB, GB (European patent), GR (European patent),
HU, IT (European patent), JP, KP, KR, LK, LU, LU
(European patent), MC, MG, ML (OAPI patent), MR
(OAPI patent), MW, NL, NL (European patent), NO,
RO, SD, SE, SE (European patent), SN (OAPI patent),
SU+, TD (OAPI patent), TG (OAPI patent).

Published

With international search report.

(54) Title: METHOD AND APPARATUS FOR DATA COMPRESSION WITH REDUCED DISTORTION

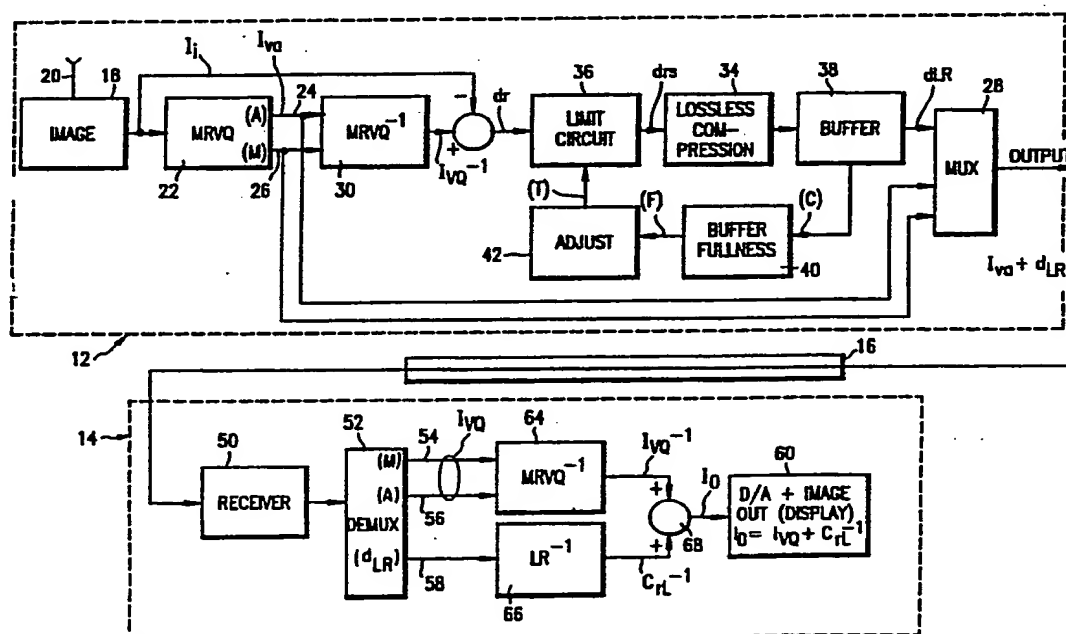

(57) Abstract

Apparatus for compressing data is disclosed in which input data is compressed by a vector quantization process (22) and decoded by the vector quantization process (30). The input data and the decoded input data are compared and a different signal (dr) is produced. A portion of the difference signal (drs) is preferably losslessly compressed and transmitted with the vector quantized input signal to a decoder over a communication channel. The decoder (14) decodes the vector quantized portion of the signal (Ivq) and the compressed difference signal (dLR) for reconstructing the input signal with an error which is less than that which would result from uncompensated vector quantization.

+ DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

METHOD & APPARATUS FOR DATA
COMPRESSION WITH REDUCED DISTORTION

BACKGROUND OF THE INVENTION:

The invention relates generally to data compression. More specifically, the invention relates to a method and apparatus for compressing image data utilizing and encoding technique which results in reduced distortion or error in the data.

Numerous fields of endeavor make use of vector quantization processing. One newly emerging application is data compression. The preferred embodiment of the invention will be described with particular reference to compression of image signals, though such an illustration is not a limitation on its scope.

A quantizer is a device which represents one signal which can take on a large number of values by another signal which can take on only a limited number of values. A four bit analog-to-digital converter, for example, represents the value of a continuously varying (i.e., analog) signal by a digital signal which can have only one of sixteen values. Scaler quantizers operate on signals having a single degree of freedom, such as an analog-to-digital converter operating on a voltage signal. Vector quantizers operate on signals having multiple degrees of freedom as will be discussed more fully below.

A vector quantizer for compressing video images conceptually divides the image into numerous small areas called pixels (a term formed from the words "picture" and "element"). Pixels are sufficiently small that the intensity of the image is approximately constant across the pixel area. For example, a black and white image of a house might be divided into a grid of 600 rows and 600 pixels per row. Each pixel would be like a small dot in the image. A group of pixels together would form a

vector which can be thought of as a small subimage. For example a 6 x 6 square patch of pixels forms a vector which may be a portion of a shadow, or part of the roof line against a light background. Vectors formed from an image shall be called image vectors. The present invention operates on vectors which, for the illustrated example, are image vectors. In general, any source of vector signals may be used, and vectors which are subject to quantization are more generally referred to as input vectors.

While a black and white image serves as an example here, vectors might also be formed from red, green, or blue levels from a color image. They might also be formed from Y,I and Q components of a color image, or from transform coefficients of an image signal on which a Hadamard, Fourier, or other transform has operated.

Numerous methods exist for manipulating an image to form image vectors. For example, a television camera might generate an analog video signal in a raster scan format having 600 scan lines per frame. An analog-to-digital converter could then digitize the video signal at a sampling rate of 600 samples per scan line. Digital signal processing equipment can then store the digital samples, and group them into vectors. The process of digitizing an analog video signal is a form of scalar quantization which is similar to but distinct from methods of vector quantization. The discussion which follows assumes that one of many methods well known in the art of signal processing can be used to produce input digital image signals.

Before quantizing an image, a vector quantizer stores a set of "codebook" vectors in memory. Codebook vectors are vectors which are chosen to be representative of commonly found image vectors. The quantizer stores a sufficient variety of codebook vectors so that at least one closely matches each of the

many vectors that might be found in the full image.

Each codebook vector is assigned a unique identification code. The set of all codebook vectors is called a codebook.

5 In practice, the identification code for a codebook vector may be an address in a memory which stores the vector values. The precise order of the entries may be arbitrary, or it may be selected according to some property of the vectors.

10 When quantizing a full image, a vector quantizer divides the full image into a series of image vectors. For each image vector, the vector quantizer identifies one closely matching codebook vector. The vector quantizer then generates a new signal made up of the series of the identification codes of the selected
15 codebook entries.

Regeneration of the full image can be accomplished by a device which has the complete codebook stored in memory. The device regenerates the image signal by
20 replacing each ID code in the quantized signal with its corresponding codebook vector. The regenerated image differs from the original image, because codebook entries do not precisely match the original image vectors. The difference is called distortion or loss.
25 Some forms of compression result in little or no loss. In effect, the input signal is changed in form but not in quality. While such compression techniques may not significantly effect or reduce bandwidth or processing time, other advantages such as improved signal quality
30 or equipment compatibility may result. However, when system constraints exist, it may be necessary to suffer a certain level of distortion. The amount of such distortion which is tolerable depends, in part, on whether it is noticeable. In video transmission systems
35 for example, the viewer may be the best judge of whether the distortion is in fact acceptable. Some vector

quantizer systems have produced acceptable distortion with conventional video formats (i.e. 512 x 512 pixels). High definition television (HDTV) however has approximately 5 times the data of conventional TV formats. Accordingly compression techniques which produce tolerable distortion levels for conventional television may not work with HDTV. Also, if bandwidth requirements can be reduced without loss of picture quality, channel capacity may be increased.

SUMMARY OF THE INVENTION:

The present invention comprises a method and apparatus for compressing an input signal with reduced distortion. A vector quantizer responsive to the input signal produces a vector quantized signal representative of an approximation of the input signal. A decoder responsive to the vector quantizer signal produces a replica of the input signal which has a distortion resulting from such vector quantization equal to the difference between the input and replica. In a preferred embodiment a lossless compressor responsive to the difference, losslessly encodes a selected significant portion of said difference. A decoder responsive to the vector quantized signal and the encoded portion of the difference produces an output signal different from the input by an amount less than the distortion resulting from vector quantization.

BRIEF DESCRIPTION OF THE DRAWINGS:

Fig. 1 is a schematic block diagram of the apparatus for compressing data with reduced distortion according to the present invention; and

Fig. 2. is a graphic representation of a data input limit as a function of buffer fullness employed in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:

The discussion which follows makes use of mathematical concepts and notations from the field of vector algebra. Such notations provide precise and widely understood terms which are best suited to disclosing the operation of the invention.

TERMS & NOTATIONS:

Scalar: A single value. Scalars are denoted by lower case letters (sometimes with subscripts). For example, a scalar may be designated as "a" or as "a₁".

Vector: An ordered set of scalars. Vectors are denoted by upper case letters (sometimes with subscripts). For example, a vector may be designated as "A" or "A₁". The dimension of a vector is the number of scalar elements in the ordered set. Vectors may also be denoted by listing its scalars in brackets. For example, a two dimensional vector may be designated as "{a₁, a₂}". A set of vectors shall be designated by an underlined capital letter. For example, a set of codebook vectors may be designated as S.

Mean: A scalar which is the average of the scalar value of a vector divided by the number n of vector elements.

$$\bar{A} = \sum_{1}^n a_{1-n} / n$$

Address: Identification code for a codebook entry.

Norm: A scalar which is a measure of the magnitude of the vector. The norm of a vector shall be denoted by an upper case letter (which designates the vector) between vertical bars. For example, for a vector A = {a₁, a₂}, the norm of A is a scalar h, i.e.,

$$|A| = h$$

Unless otherwise noted, the norm of a vector may be calculated as sum of the absolute values of the scalar values of a vector, e.g.:

$$|A| = h_1 = |a_1| + |a_2|.$$

5 Vector Sum: A vector sum is itself a vector whose scalar elements are the sum of the corresponding elements of two vectors. For example, for two vectors $A = \{a_1, a_2\}$ and $B = \{b_1, b_2\}$ the sum of A and B is a vector C, i.e.:

$$A + B = C = \{c_1, c_2\} = \{(a_1 + b_1), (a_2 + b_2)\}.$$

10 Vector Difference: A vector whose scalar elements are the differences of the corresponding elements of the two vectors. For example, for two vectors $A = \{a_1, a_2\}$ and $B = \{b_1, b_2\}$ the difference between A and B is a vector E, i.e.:

$$A - B = E = \{e_1, e_2\} = \{(a_1 - b_1), (a_2 - b_2)\}.$$

15 Distance: A scalar which is the norm of the vector difference between the two vectors. Distance shall be denoted by the small case letter d followed by two vectors in parenthesis. For example, for two vectors $A = \{a_1, a_2\}$ and $B = \{b_1, b_2\}$, the distance between A and B shall be a scalar h written as:

$$d(A,B) = h_{A,B} = |A - B|$$

20 For the purpose of this discussion, the norm is taken as the sum of the absolute values of the scalar elements of the distance vectors. Written another way:

$$d(A,B) = h_{A,B} = |A - B| = |(a_1 - b_1)| + |(a_2 - b_2)|.$$

The distance might alternatively be one of the well known Euclidean Norms, such as square root of the sum of the squares of the differences of the scalar elements of the vectors. Written another way:

$$d(A,B) = h_{A,B} = \sqrt{(a_1 - b_1)^2 + (a_2 - b_2)^2}$$

5 The following definitions are also included here for convenience.

Codebook Vector: A vector which is representative of a region of a vector space.

10 Input Vector: A vector which serves as input data to a vector quantizer.

Image Vector: A vector formed from image data.

Measure: An operator which provides a unit of comparison, e.g. distance or magnitude.

15 Representative Element: An element of a set which is representative of a subset of elements from the set (e.g. a codebook vector is representative of a subset of all possible vectors).

20 Input Element: An element which serves as an input to a processor which matches the input element to a representative element (e.g. an input vector is an input to a vector quantizer).

THE SEARCH METHOD:

25 In accordance with a preferred embodiment of the present invention, input data in digital form is subjected to a vector quantization process developed by Richard Baker and published in June, 1984 in his PhD. Dissertation entitled "Vector Quantization of Digital Images" at Stanford University. Baker's algorithm known as Mean Residual Vector Quantization quantizes or
30 compresses an input data stream.

The codebook set may be designed in accordance with an article by Buzo and Gray entitled "An Algorithm for Vector Quantizer Design", IEEE Transactions On Communications, Vol. Com.-28, No. 1 (Jan. 1980).
5 Thereafter, the vectors from the codebook are searched in order to map the input vector with the closest codebook vector. In order to reduce distortion or error various search techniques have been developed to find the best match. One very accurate and fast technique is
10 disclosed in copending patent application of Bi et al entitled "A Full Search - Equivalent Method For Matching Data And A Vector Quantizer Utilizing Such Method", Serial No. _____, Filed June 9, 1989, and assigned to Utah State University Foundation, the assignee herein,
15 the search technique disclosed in Bi et al employs the following steps:

- 1) compute a norm or other characteristic measure of the input vector I ,
- 2) identify a reference codebook vector A_j having
20 a norm which is closest to the norm of the input vector I ,
- 3) compute the distance $h_{I,j}$ between the input vector I and the reference codebook vector A_j ,
- 4) identify a subset S of the codebook vectors
25 made up of codebook vectors having a norm in the range $|I| - h_{I,j}$ to $|I| + h_{I,j}$.
- 5) search the subset S for the codebook vector having the smallest distance to the input vector.
- 30 6) select the codebook vector having the smallest distance to the input vector.

In all such search methods there is a difference between the input vector and the codebook vector because codebooks have less information and all possible input
35 vectors. For example in the Bi et al search method described above, the distance between the vectors is a

measure of distortion. For purposes of images, other norms (i.e., other measures of distortion) can be defined. Typically distortion can be reduced by increasing the accuracy of the search method so that the best codebook vector is selected. Accuracy can also be increased by adding more codebook vectors to the table. These techniques increase processing time and bandwidth requirements which is often undesirable and counterproductive. Also once the vector quantized signal is transmitted it is not possible to accurately correct for distortion. In accordance with the present invention, distortion is accurately characterized prior to transmission, and the most significant distortion information is transmitted with the vector quantized signal so that the image can be reassembled with reduced distortion.

SYSTEM DESCRIPTION:

Fig. 1 is a block diagram of a statistically lossless compression system 10 according to the present invention. Statistically lossless may be defined as a non zero loss which is not perceptible at the desired resolution. The system 10 includes an encoder/transmitter 12 for encoding and transmitting a data stream and a decoder/receiver 14 responsive to the encoder 12 over a channel 16 for receiving and decoding and reassembling the data stream with reduced distortion. The encoder 12 includes an image input 18 which receives an analog input via input channel 20. In the preferred embodiment the analog input is a video signal. Image input 18 converts the analog signal to an input vector I_1 . A mean residual vector quantizer (MRVQ) 22 vector quantizes the input vector I_1 . The MRVQ may be operable in accordance with the algorithm described in Baker's paper and the Bi et al patent application referred to above. Also, a preferred circuit for

searching the codebook in the MRVQ is described in the patent application of Paul D. Israelsen entitled "Vector Quantizer Codebook Processing Circuit", Serial No. 333,976 Filed April 6, 1989 and assigned to the Utah State University Foundation, the assignee herein. The MRVQ 22 has a table of codebook vectors stored therein. The vector input I_i is encoded as an address representative of the location in memory of the stored codebook vector selected in accordance with the Bi et al search method. The MRVQ also produces a mean which is the average of the scalar of values of the codebook vector divided by the number of elements. The mean normalizes the codebook vectors thereby reducing the size of the codebook and thus the storage requirements. Address output 24 and mean output 26 of MRVQ 22 are coupled to the output multiplexer 28, as shown, for transmission to the receiver 14 over the channel 16 described hereinafter. The combined address 24 and mean 26 are sometimes referred to as the vector quantized input signal I_{vq} . The address and means outputs 24, 26 of MRVQ 22 are also coupled to an inverse mean residual vector quantizer (MRVQ⁻¹) 30 which is a decoder having stored therein a table of codebook vectors identical to and at the same addresses that are stored in MRVQ 22. The MRVQ⁻¹ decodes the vector quantized signal I_{vq} to produce an inverse input vector I_{vq}^{-1} , which is an approximation of the input vector I produced by the image input 18. Inverse input vector I_{vq}^{-1} has some associated measurable residual distortion or error d_r in accordance with the following expression:

$$I_i = I_{vq}^{-1} + d_r$$

In prior systems, an inverse MRVQ is typically remotely located for receiving and decoding the MRVQ output to produce a decoded input which is converted to an analog signal for display on cathode ray tube (e.g. Television). In such prior systems, the distortion

inherent in the encoded MRVQ signal cannot be readily corrected accurately because the receiver does not have distortion information.

5 In accordance with the present invention, however, the residual distortion d_r is characterized in the encoder/transmitter 12 prior to transmission of the vector quantized input I_{vq} to the decoder/receiver 14, and a selected significant portion of the residual distortion d_r is communicated to the decoder/receiver 14
10 so that a correction can be made during reassembly of the input signal.

The residual distortion d_r is measured or characterized by subtracting the inverse image vector I_{vq}^{-1} from the vector input I_i in the summer 32. In a
15 preferred embodiment a portion d_{rs} of the residual distortion d_r produced by the summer 32 is communicated to a lossless compressor circuit 34 via a truncation or limit circuit 36. If desired, it would be possible to use a lossy compressor without departing from the
20 invention.

In accordance with the invention, and for purposes explained hereinafter, the limit circuit 36 selectively limits or truncates the amount of residual distortion data communicated to the compression circuit to the most
25 significant value, namely d_{rs} . The lossless compression 34 compresses or encode the truncated distortion data d_{rs} from limit circuit 36 and produces as an output a compressed lossless residual distortion d_{lr} . Buffer 38 receives the encoded signal d_{lr} and communicates it to
30 the multiplexer 28 on line 39 as shown.

The buffer 38 has a selected capacity C. A buffer fullness circuit 40 responsive to the state of the buffer 38 produces a fullness signal F indicative of the buffer condition. A limit set circuit 42 responsive to
35 the buffer fullness condition produces a truncation adjustment signal T for the limit circuit 36 so that its

output is limited to the most significant residual distortion d_{rs} .

It is desirable to transmit data at a maximum uniform rate compatible with the capacity of the transmission medium or other system constraints. Accordingly, the encoder/transmitter 12 controls the amount of data transmitted over channel 16 to the receiver/decoder 14 by adjusting or varying the limit set 42 in accordance with the buffer capacity C. Thus, as the buffer 38 fills to capacity C the limit set 42 is increased to thereby selectively truncate the distortion data. In other words, limit set 42 establishes a threshold at which truncation of the distortion data occurs.

In a preferred embodiment the limit set 42 is varied linearly over a range of buffer fullness values F with end limits at the extremes of buffer fullness. For example, Fig. 2 illustrates graphically a plot of the limit set values T versus buffer fullness F as a percentage of buffer capacity C. The curve 44 varies linearly as shown. At the respective lower and upper extremes 46 and 48 (for example less than 10% C and greater than 90% C) the curve 44 is flat. Thus, the output F of the buffer fullness circuit 40 varies linearly over approximately 80% of the buffer capacity C. However, as can be appreciated from the curve 44, the buffer 38 is not permitted to become empty (0% C) or full (100% C), but instead the curve 44 is constant at the extremes 46, 48. Although the preferred relationship illustrated in Fig. 2 may be varied, if desired, it has been found that a stable maximum data rate from the buffer 38 is achieved by its implementation.

The buffer capacity C is sufficient to allow the encoder/transmitter 12 to transmit data over the channel 16 at a constant data rate. The buffer fullness circuit

40 and truncation adjustment circuit 42 provide negative feedback to limit set circuit 36 so that as the capacity C of buffer 38 is approached, data to the buffer 32 is reduced and vice versa. Further, because the most significant portion of the residual distortion is encoded, an effective mechanism for error compensation results. The most significant residual distortion d_{1r} , although truncated or limited, when losslessly compressed or encoded as d_{1r} is useful in correcting or compensating for the most perceptible distortion in the reassembled signal.

The lossless compressor 34 is a device capable of encoding distortion data losslessly (i.e. accurately and without its own error). Known examples of lossless compression techniques include Huffman Coding, Lempel Zev Coding, Splay Tree Coding and Run Length Coding. These forms of compression are accurate. Thus, the significant portion of the residual distortion d_{1r} , which is compressed according to any one of such techniques and is substantially error free. The only loss that exists is associated with truncation. Therefore, although some loss occurs, it is controlled in such a way that the encoder/transmitter 12 produces effectively no perceptible loss. Hence, the term statistically lossless encoding is appropriate. For example, it has been found that a conventional color tv picture of 512 x 512 pixels can be magnified by a factor of eight using the techniques of the present invention without visually perceptible distortion. Thus, eight fold compression can be achieved without perceptable distortion.

DECODER/RECEIVER:

The multiplexed signals representing the vector quantized input I_{vq} (address (A) and mean (M)) and the lossless residual d_{1r} are communicated to the decoder/receiver 14 via the communication channel 16.

The receiver 50 in the decoder/receiver 14 captures the signals I_{vq} and d_{lr} . The multiplexer 52 responsive to the receiver 50 separates the encoded signals and produces corresponding address 54, mean 56 and lossless residual 58 outputs as shown. An inverse mean residual vector quantizer ($MRVQ^{-1}$) 64 (which is identical to $MRVQ^{-1}$ 30 in the encoder/transmitter 12) is coupled to the address (A) and mean (M) outputs 54, 56. $MRVQ^{-1}$ receives and decodes the address and mean in order to produce an inverse vector quantized input I_{vq}^{-1} which is identical to the signal produced by $MRVQ^{-1}$ 30 referred to above. Thus, the inverse vector quantized signal I_{vq}^{-1} in the encoder/transmitter 12 which represents the approximation of the input vector I_1 having residual distortion d_r is reproduced in the decoder/receiver 14.

An inverted lossless residual decoder (LR^{-1}) 66 receives and decodes the lossless residual output 58 of multiplexer 52 and produces a decoded lossless residual d_{lr}^{-1} . The inverse vector quantized signal I_{vq}^{-1} and the inverse lossless residual d_{lr}^{-1} are added in the summer 68 in order to produce an image output signal I_0 which may be digital to analog (D/A) converted for display in analog output system 60. The image output I_0 is a close representation of the image input I_1 with the most significant portion of truncated residual distortion d_r added back in. The decoded image I_{vq}^{-1} is a fair representation of the image input I_1 but without distortion compensation. The image output I_0 has distortion compensation. Thus, the image output I_0 is a more accurate representation of the input I_1 than the inverse vector quantized input I_{vq}^{-1} alone.

The image output I_0 more accurately represents the input I_1 because an accurate compensating signal (i.e. lossless residual d_{lr}) accompanies the vector quantized image signal I_{vq} for reassembly at the decoder/receiver

-15-

14. In mathematical terms the relationship between the Input I_i and the output I_o follows:

$$\begin{aligned} I_i &= I_o - d_{rs} \\ I_i &= I_{vq}^{-1} - d_r \\ d_r &> d_{rs} \\ I_i &> I_o > I_{vq}^{-1} \end{aligned}$$

Thus, the output vector I_o has more information in it concerning the input vector I_i than the inverse vector quantized input I_{vq}^{-1} . In other words, the difference between a decoded vector quantized signal and the original input is greater than the difference between loss compensating output vector and the original input vector. The compensation also is the most significant portion of the error or loss. The system also takes advantage of the maximum bandwidth available by regulating the output from the encoder/transmitter 12 in order to maximize the data rate compatible with the system. The combination of an efficient vector quantizing circuit such as MRVQ 22 with a regulated lossless compressor 34 for transmitting a compensating signal results in statistically lossless system in which distortion is not perceptible at the desired resolution.

While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modifications. This application is intended to cover any variations, uses or adaptations of the invention following, in general, the principles of the invention, and including such departures from the present disclosure as come within known and customary practice within the art to which the invention pertains.

WHAT IS CLAIMED IS:

1 1. Apparatus for producing compressed data
2 representative of an input signal comprising:

3 vector quantizing means responsive to the
4 input signal for encoding the input signal;

5 inverse vector quantizing means responsive to
6 the encoded input signal for producing a decoded
7 input signal different from the input signal;

8 summing means responsive to the input signal
9 and the decoded input signal for producing a
10 difference signal;

11 compressing means responsive to the summing
12 means for producing an encoded difference signal;
13 and

14 decoding means responsive to the encoded input
15 signal and the encoded difference signal for
16 reconstructing the input signal with an error
17 smaller than the difference signal.

1 2. Apparatus for producing a compressed data
2 stream representative of an input data stream
3 comprising:

4 vector quantizing means responsive to the
5 input data stream for encoding it into a vector
6 quantized stream;

7 inverse vector quantizing means responsive to
8 the vector quantized stream for producing a decoded
9 input data stream;

10 means for comparing the input data stream and
11 the decoded input data stream for producing a
12 distortion stream representative of a difference
13 between said streams;

14 compression means responsive to the distortion
15 stream for selectively encoding it into an encoded
16 distortion stream; and

17 means responsive to the vector quantized
18 stream and the encoded distortion stream for
19 decoding the streams and producing an output data
20 stream more closely resembling the input data
21 stream than the decoded input data stream.

1 3. Apparatus for producing an output signal
2 representative of an input signal comprising:

3 encoding means responsive to the input signal
4 for producing an encoded input signal approximately
5 representative of said input signal;

6 first decoding means responsive to the encoded
7 input signal for producing a decoded input signal
8 different from the input signal;

9 means responsive to the input signal and the
10 decoded input signal for producing a difference
11 signal;

12 means compressing a selected portion of said
13 difference signal; and

14 second decoding means responsive to the
15 encoded input signal and the compressed difference
16 signal for producing a decoded output signal being
17 different from the input signal by an amount less
18 than the difference signal.

1 4. Apparatus according to claim 3 wherein said
2 means for compression is lossless.

1 5. Apparatus according to claim 3 wherein the
2 means for compressing the selected portion of the first
3 difference signal comprises means for truncating the
4 difference signal.

1 6. Apparatus according to claim 5 wherein the
2 means for truncating the difference signal comprises
3 buffer means having a selected capacity, said buffer

4 responsive to the amount of data in the difference
5 signal, and means responsive to the buffer means for
6 adjusting the amount of data passed to the buffer means
7 so as not exceeded its capacity.

1 7. Apparatus according to claim 3 wherein said
2 difference signal contains a selected amount of data and
3 the means for compressing a selected portion of the
4 difference signal includes means for producing said
5 difference signal at a relatively uniform data rate.

1 8. Apparatus according to claim 7 wherein means
2 for producing said difference signal at a relatively
3 uniform data rate comprises:

4 a limit circuit responsive to a limit signal
5 for limiting the difference signal, and means
6 responsive to the compressed difference signal for
7 producing said limit signal.

1 9. Apparatus according to claim 8 wherein said
2 means for producing said limit signal comprises buffer
3 means having a selected capacity and being responsive to
4 the data content of said compressed difference signal
5 and a feedback loop between the buffer and the limit
6 circuit for producing the limit signal.

1 10. Apparatus according to claim 9 wherein the
2 feedback loop comprises buffer fullness means responsive
3 to the amount of data stored in the buffer for producing
4 a fullness signal and adjustment means responsive for
5 the fullness signal for producing the limit signal.

1 11. Apparatus according to claim 10 wherein said
2 buffer fullness means comprises means for producing said
3 fullness signal over a major range of buffer capacity.

1 12. Apparatus according to claim 11 wherein said
2 fullness signal varies linearly over said major range of
3 buffer capacity and further includes invariant minor
4 portions at extremes of said buffer capacity.

1 13. Apparatus according to claim 12 wherein said
2 major portion of the buffer capacity is between about 10
3 and 90% and the invariant portions of between 0 and 10%
4 and 90 and 100%, respectively.

1 14. Apparatus according to claim 3 wherein the
2 means for encoding the input signal includes vector
3 quantizing means and the first decoding means comprises
4 inverse vector quantizing means.

1 15. Apparatus according to claim 14 wherein the
2 second decoding means comprises inverse vector
3 quantizing means responsive to the encoded input signal
4 and inverse compressing means responsive to the encoded
5 difference signal for producing a decoded difference
6 signal.

1 16. Apparatus according to claim 15 further
2 comprising summing means responsive to the decoded input
3 signal and the decoded difference signal from the second
4 decoder for producing said decoded output signal.

1 17. Apparatus according to claim 3 further
2 comprising:

3 transmitting means responsive to the encoding
4 means and the compressing means for transmitting
5 the encoded input signal and the compressed
6 difference signal;

7 receiving means coupled to the second decoder
8 means for receiving said encoded input signal and

9 said compressed difference signal and coupling the
10 same to the second decoder means; and
11 communications means between the transmitter
12 and receiver for carrying said encoded input signal
13 and said difference signal from the transmitting
14 means to the receiving means.

1 18. Apparatus according to claim 17 wherein said
2 means for compressing the difference signal comprises at
3 least one of the Huffman coding apparatus, Lempel Zev
4 encoding apparatus; Splay Tree encoding apparatus and
5 Run length encoding apparatus.

1 19. A method for compressing input data comprising
2 the steps of:

3 encoding the input data into an encoded input;
4 decoding the encoded input into a decoded
5 input;

6 comparing the input data with the decoded
7 input for producing a difference;

8 compressing a portion of the difference into
9 and encoded difference;

10 combining the encoded input and the encoded
11 difference into a compensated encoded form;

12 decoding the compensated encoded form for
13 producing compensated output data which resembles
14 the input data more closely than the decoded input.

1 20. The method according to claim 19 wherein the
2 compressing step is lossless.

1 21. The method according to claim 19 wherein the
2 step of compressing a portion of the difference further
3 comprises limiting said encoded difference to a
4 relatively constant data rate.

1 22. The method according to claim 21 wherein
2 encoding the data comprises the step of mean residual
3 vector quantization.

1 23. The method according to claim 22 wherein
2 decoding the encoded data comprises the step inverse
3 vector quantization.

1 24. The method according to claim 23 wherein the
2 decoding the compressed encoded form for producing the
3 compensated output comprises the step of inverse vector
4 quantization and inverse residual compression.

1 25. A method for compressing data with reduced
2 distortion comprising steps of:

3 compressing an input signal;
4 determining distortion resulting from
5 compression of the input signal;
6 compressing the distortion;
7 combining the compressed input signal and at
8 least a significant portion of compressed
9 distortion;
10 decompressing the combined compressed input
11 signal and compressed distortion for producing a
12 replica of the input with less distortion than the
13 compressed input signal.

1 26. The method of claim 25 wherein the step of
2 compressing the distortion is lossless.

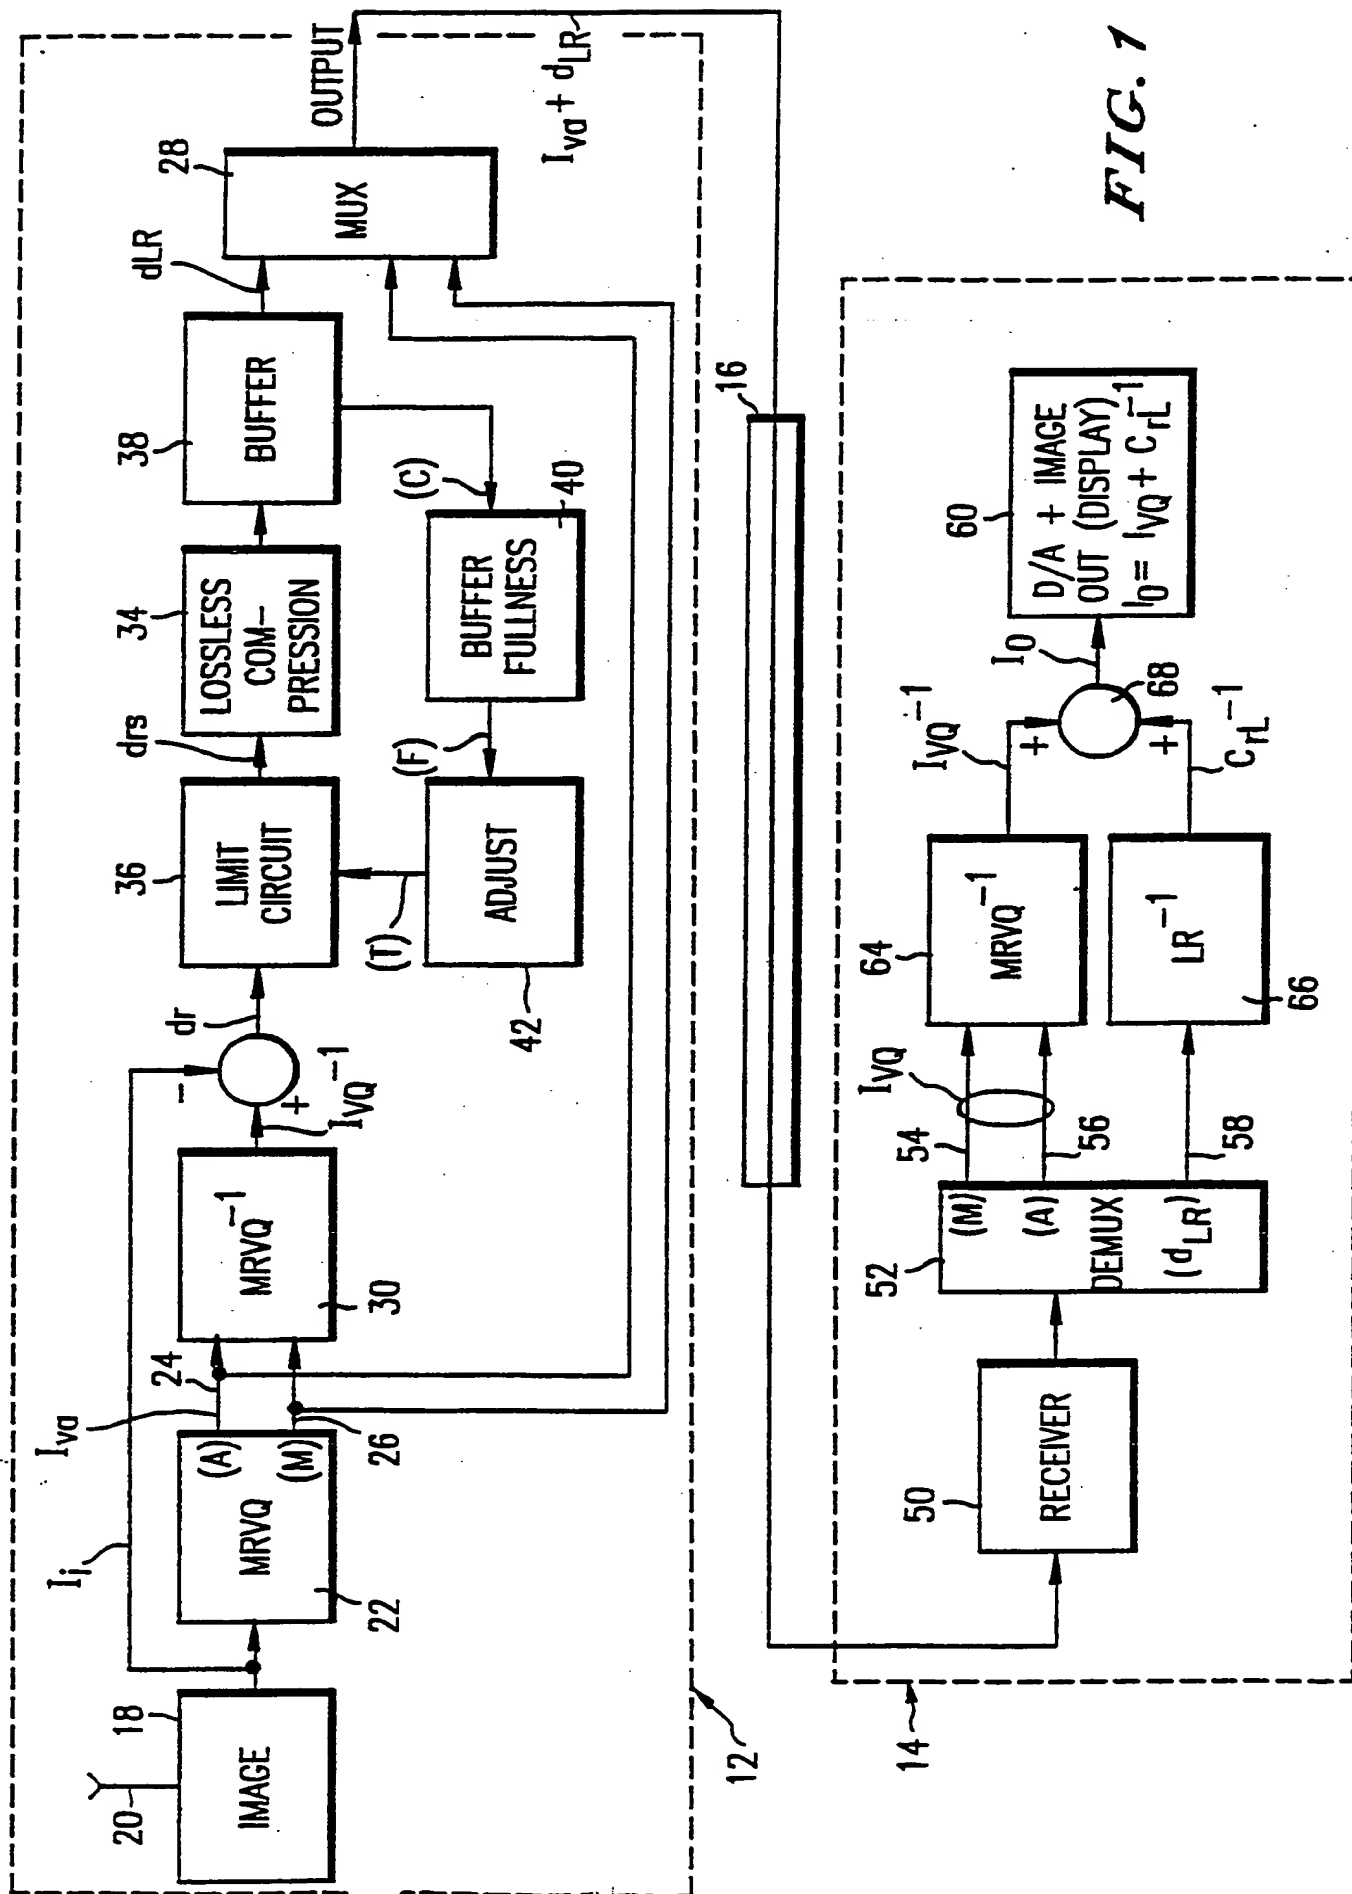
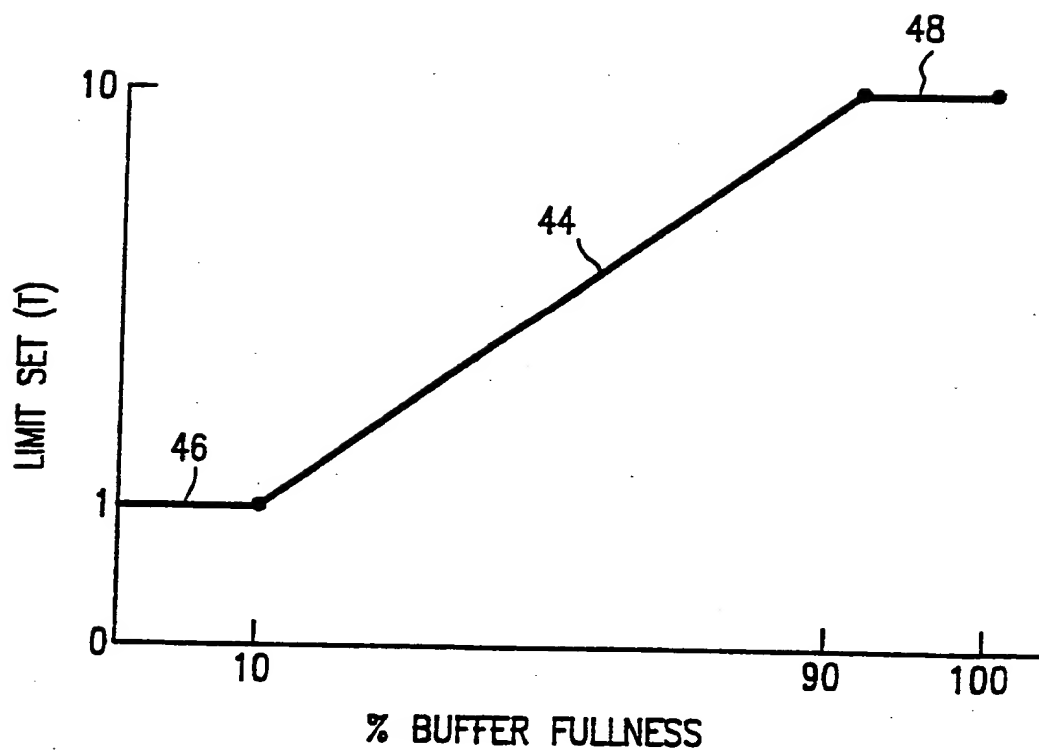


FIG. 1

2/2

**FIG. 2**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 90/06670

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)⁶

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl. 5 H03M7/30

II. FIELDS SEARCHED

Minimum Documentation Searched⁷

Classification System

Classification Symbols

Int.Cl. 5

H03M ; H04N

Documentation Searched other than Minimum Documentation
to the extent that such Documents are included in the Fields Searched⁸III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹

Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	GB,A,2210236 (NEWBRIDGE NETWORKS CORP.) 01 June 1989 see page 2, line 12 - page 3, line 26 see page 7, line 14 - page 14, line 16; figures 1-4	1-3, 14-17, 19, 21-25
Y	---	5-6, 8-11, 18
P,X	US,A,4903317 (NISHIHARA ET AL.) 20 February 1990 see column 2, line 60 - column 4, line 51; figure 1	3-4, 19-20, 25-26
X	& JP,A,63045684 ---	
	--- -/-	

¹⁰ Special categories of cited documents:^A document defining the general state of the art which is not considered to be of particular relevance^E earlier document but published on or after the international filing date^L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)^O document referring to an oral disclosure, use, exhibition or other means^P document published prior to the international filing date but later than the priority date claimed^T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention^X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step^Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.[&] document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

19 APRIL 1991

Date of Mailing of this International Search Report

17. 06. 91

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

AUGARDE E. P. G. T.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
X	ELECTRONICS AND COMMUNICATIONS IN JAPAN. vol. 69, no. 1, January 1986, NEW YORK US pages 75 - 84; T.UDA et al.: "Picture coding by an adaptive multistage quantization" see paragraph 3.1; figure 2 ---	1-3, 19, 25
Y	EP,A,287679 (MITSUBISHI) 26 October 1988 see page 15, line 16 - page 17, line 26; figures 1, 7, 11 ---	5-6
A	---	8-11, 22, 24
Y	US,A,4179710 (ISHIGURO ET AL.) 18 December 1979 see column 1, line 34 - column 2, line 34; figure 5 ---	8-11
Y	US,A,4745474 (SCHIFF) 17 May 1988 see column 2, line 6 - column 3, line 37; figure 1 ---	18
A	---	6, 9-11

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

US 9006670
SA 43845

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19/04/91

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2210236	01-06-89	US-A- 4972483	20-11-90
US-A-4903317	20-02-90	JP-A- 63003383	08-01-88
		JP-A- 63003384	08-01-88
		JP-A- 63003385	08-01-88
		JP-A- 63045684	26-02-88
		JP-A- 63253784	20-10-88
		JP-A- 63125078	28-05-88
		JP-A- 63131273	03-06-88
EP-A-287679	26-10-88	JP-A- 63178670	22-07-88
		JP-A- 63100888	02-05-88
		WO-A- 8802975	21-04-88
		US-A- 4878230	31-10-89
US-A-4179710	18-12-79	JP-A- 52101920	26-08-77
		JP-C- 1365495	26-02-87
		JP-A- 52151516	16-12-77
		JP-B- 61018395	12-05-86
		CA-A- 1087741	14-10-80
US-A-4745474	17-05-88	EP-A- 0355120	28-02-90
		JP-T- 2503139	27-09-90
		WO-A- 8808237	20-10-88